

Installation Guidance Note: Allura Puzzle

General Advice

The appearance, performance and durability of the installed floorcovering will be determined to a large extent by the quality of the prepared subfloor and the conditions in which they are laid. As with any resilient floor covering irregularities in the subfloor will be apparent in the finished flooring.

The installation of Allura Puzzle should be carried out in accordance AS1884-2021 "Resilient sheet and tiles laying and maintenance practices". Areas to receive flooring should be clean, free from other trades, fully enclosed and weather tight. Subfloors should be clean and free of contaminants, smooth, sound, even and permanently dry.

Always conduct moisture tests on **all** substrates. All ground-based level floors should have an effective moisture barrier.

Areas to receive flooring shall be adequately lit to allow for proper inspection of the substrate, installation and for final inspection.

The maximum tolerance in terms of flatness and evenness of the substrate is an 5mm deviation under a 2m Straight edge (measured by moving the straight edge in all directions across the substrate) and 1mm under a 20cm straight edge.

It is essential that the laying area is at a steady temperature of minimum 18°C for 48 hours prior to, during, and for 24 hours after installation. The material should be conditioned in the same environment for at least 24 hours prior to the installation. Where the floorcoverings have been stored or transported immediately prior to delivery in temperatures below 10°C the acclimatisation period should be extended to 48 hours. Puzzle tiles should be removed from their pallets and acclimatized in the laying are stacked no more than 20 tiles high.

Prior to installation tiles should be checked to ensure that the correct colour, batch number and quantity have been received and that the material is in good condition. No claim will be accepted for incorrect colour, pattern or obvious damage if the material has been fitted.

Use material from the same batch/dye lot. The use of different production batches will always result in visible shade differences. The batch number is clearly marked on the material packaging and must be checked before commencement of installation.

Store Allura Puzzle on their pallets in a clean dry area.

Allura Puzzle is occupier ready on completion of the installation. However, if the newly installed floor is going to be subjected to heavy site traffic, particularly high point load wheeled traffic, prior to occupation the floor should be protected during this phase (see "on completion" at the end of this guide).

Note: Incidental low-level light will exaggerate any unevenness in the subfloor.



In service load limits

Static load limits:

- Maximum concentrated load per point < 750 kg
- Maximum load pressure <40 kg / cm²

Dynamic load resistance:

- Lifting and handling machines, electrically or thermally powered, are likely to cause surface damage due to wheel skidding. It is necessary to ensure that equipment is suitable for the floor covering structure. (for example, vehicles should be equipped with an anti-skid system.)
- Paired wheels are counted as a single wheel when their distance (centre distance or track) is <20cm.
- Metal wheels are excluded.
- Tyre and wheel type: Polyurethane or equivalent hardness
- Total load per wheel: <750 kg
- Contact pressure: <40 kg / cm²
- Speed: ≤ 5 km/h
- Loading and handling: Hand operated trucks, manual or electric pallet trucks with on-board driver, with a load capacity of 1300 kg.

Acceptable substrates

Allura Puzzle may be installed on the following substrates (subject to the conditions in this guide):

- New or existing concrete, cement screed or terrazzo substrate
- New or existing wood panel or particle board substrates
- Existing ceramics tiles
- Old in-situ floor finishes (resin) at least 2 mm thick
- Old floor paint
- Old compact resilient floor coverings (semi-flexible tiles, vinyl asbestos tiles, sheet vinyl flooring and linoleum).
- Raised Access floors
- Existing wood block floors

For any subfloor not listed above or if any doubt exists, contact Forbo Flooring Technical Services.

Concrete slabs, cementitious screeds or terrazzo floors: New and existing ground floor slabs must be cast on a damp-proof membrane in accordance with the National Code of practice for the installation of resilient floor coverings. If an effective damp proof membrane is not present or any doubt exists, a surface damp proof membrane should be applied.

Allura Puzzle can be laid on substrates with cracks less than 3 mm wide on unheated subfloors, provided that there is no difference in level. For cracks that do not meet these criteria contact Forbo flooring for further guidance.

Where required, smoothing and levelling compounds rated for heavy traffic areas should be applied to screeds and slabs. Smoothing compounds are not required for clean, sound and smooth concrete surfaces, provided that they satisfy flatness tolerances stated above.

If a smoothing compound is not being applied to the surface of the slab/screed a suitable primer should be applied to keep the subfloor dust free.

Wood panel substrates (tongue-and-groove boards) - plywood or particle board floors should be prepared in accordance with the National Code of practice for the installation of resilient floor coverings. Differences in height between boards greater than 1mm should be sanded flush.

Old ceramics tiles: laid on a sound concrete or cement screed substrate, soundly adhered to the bedding screed (sealed ceramics tiles) or substrate (adhesive-bonded ceramics tiles) require no further treatment where the tiles are level and the grout joint width is less than 8 mm and no more than 3mm deep. Small localised differences in level between tiles may be repaired/levelled with a suitable smoothing / levelling compound.

Where the above requirements are not met, a general heavy duty self-smoothing/levelling compound suitable for the room's intended purpose should be applied across the entire surface area.



FLOORING SYSTEMS

Existing resin floor finish: the old finish must be sound and fully bonded and at least 2 mm thick. If flatness, cleanliness and bond requirements are not satisfied, the old floor finish must be removed, and the subfloor prepared in accordance with the national code of practice.

Floor paint: existing paint finishes should be clean and sound. Sanding is not necessary if the paint is sound.

Old flexible floor coverings: semi-flexible tiles, vinyl asbestos tiles, sheet vinyl flooring, acoustic flooring and linoleum should:

- a. Be sound and bonded tightly to the sub floor.
- b. Have loose or broken areas removed and replaced with sound material or levelled with a good quality smoothing compound.
- c. Are level within the requirements stipulated
- d. Be abraded to remove old wax, seals and dirt (where adhesive systems such as tapes are to be applied) and then thoroughly cleaned.

If any doubt exists, or where full adhesion is required, existing floor coverings should be removed.

Note: Allura Puzzle can only be laid on a substrate that has previously received only a single layer of resilient floor covering. The performance rating of the old floor covering must satisfy the new rating required, particularly if the room is to be used for a different purpose.

Existing wood block floor: Allura Puzzle may be installed on existing wood block floors except for wood blocks laid at ground floor level. Blocks should be securely bonded to the base, smooth, even and free of any oil or wax based finishes. If necessary, the blocks should be sanded to remove any contaminants and/or unevenness between the blocks. If any doubt exists, contact Forbo Flooring Technical Services for advice.

Raised Access Floors should be smooth, level, free of movement and clean. Raised access flooring panels have a tendency to settle shortly after installation and this should be taken into account when considering the installation of the Allura Puzzle onto raised access flooring systems. Ridges between uneven raised floor panels may telegraph through to the finished tile installation over time and can cause lipping of tiles edges where they fall close to even joints between the panels below.

Textile floor finishes: textile floor finishes must be removed, and the subfloor prepared in accordance with national codes of practice where applicable.

Underfloor heating

Forbo flooring products may be installed over underfloor heated floors providing the maximum surface temperature of the substrate does not exceed 27°C under any condition of use.

It is imperative that the underfloor heating systems have been previously commissioned and found to be functioning correctly prior to the floor finish being installed. Ensure that the underfloor heating system is switched off 48 hours prior to the floor covering installation commencing and remains off for at least 48 hours after the installation is complete.

During the period of decommissioning of the underfloor heating system, an alternative heating source should be provided, if required, to ensure that the area of installation is kept at a constant temperature of 18°C – 27°C.

The temperature of the substrate must not exceed 18 °C during the installation of the flooring material.

If necessary, an alternate heating source should be used to maintain the room temperature at a minimum of 18°C prior to, during, and for 72 hours after installation.

The temperature of the underfloor heating system can be increased 72 hours following the installation. When raising the floor temperature, do so gradually so the substrate and flooring material can adapt to the temperature change together.

Adhesive Recommendations and application

Allura Puzzle is installed without the use of a tackifier or any type of adhesive.

Installation

General


Allura Puzzle may be laid in individual areas up to 500sqm subject to a maximum length of 25m* on the longest side of the area.

A continuous gap of 3 - 5 mm must be maintained around the perimeter in the room.

For larger installations, please contact Forbo Flooring technical services.

Finishing at doorways: at doorways or open walkways between large adjacent spaces the flooring should be finished at the door/ space threshold with a suitable proprietary edging profile.

Allura Puzzle tiles are installed Monolithic.

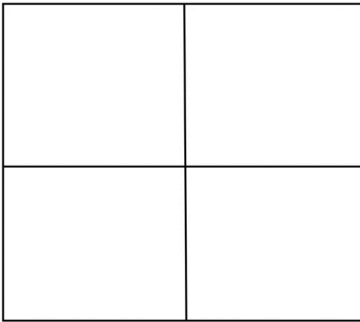


Like the natural material, some designs will vary in tone and colour. This is intentional and gives the floor a more authentic appearance.

Setting out

Allura Puzzle is set out using conventional tile installation techniques.

The correct starting point for setting out a tiled floor is traditionally the centre of the area - although this may not be the final starting point when tile laying begins. Some adjustment of the starting point may be required, for example, to avoid small perimeter cuts. In some cases, it may be simpler to work lengthwise from one end, using the centre line as a guide.

The centre line is drawn as follows: a chalk line is snapped from centre of wall A-B (=E) to the centre of wall C-D (=F). The centre of line E-F is found (M). Draw a perpendicular line through M using the 3:4:5 method to establish G-H (Figure A). Starting at centre point M, measure out lengthwise and width wise to the walls. Wherever possible, cuts of less than 15cm or so should be avoided as these are more likely to come loose at some stage in the life of the installation. Adjust the position of lines E-F and G-H if necessary. Loose laying a few rows of tiles in each direction will help to identify areas where adjustments have to be made to the starting point to avoid small cuts.

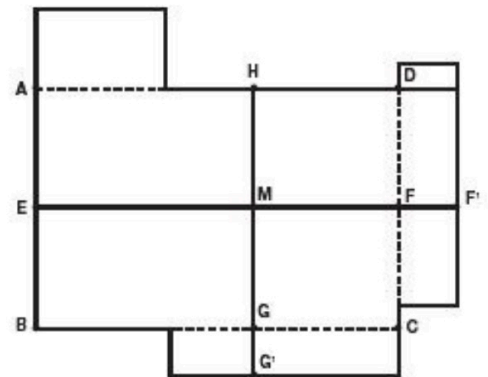



Laying and Cutting tiles

Begin laying tiles at the starting point, laying the first row. The connections between the tiles are secured using a dead blow (non-rebound) hammer (Pict. 1) along the line of the connectors.




Pict. 1

Lay subsequent tiles outward from either side of the centre start line forming a pyramid as per the diagram. Locate the corner connectors of each tile and secure the connectors using a dead blow (non-rebound) hammer. Finish the by hammering the remaining connectors on each side of the tile.

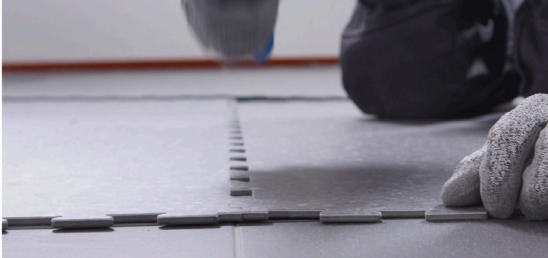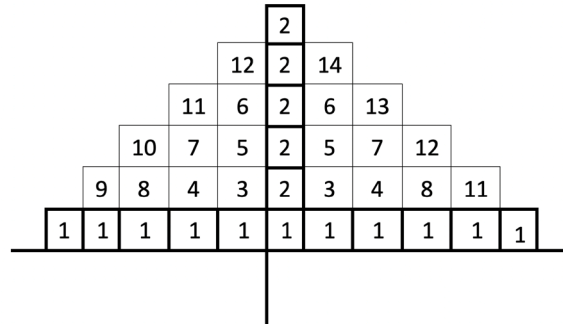

The connectors should effectively lock the tiles with reasonable force. Excessive force could adversely affect the base onto which they are being installed, which in turn could affect the long-term integrity and performance of the installed floor.

Allura puzzle can be cut with normal installation tools such as utility knives. Warming the product will make cutting easier, when cutting and fitting around shapes and pillars, for example, but in good site conditions the product can be successfully cut by scoring several times from the top surface of the tile or plank with a utility knife and a straight blade. After scoring with a knife, bend the tile back long the cut line and complete the cut through the remaining thickness from the back of the tile.

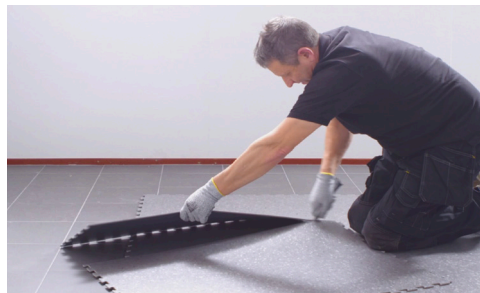

In large areas cutting of perimeter tiles with a power cutting tools is also suitable.

On completion of the installation

First impressions may have more impact on the client than hours of skilled fitting.

The completed installation should be cleared of scrap material and debris, the floor swept or vacuumed, and any traces of adhesive residues removed from the floor and skirtings.

If the floor covering is to be protected from other trades or site traffic prior to project completion, a protection product should be chosen that is appropriate for the type and level of traffic likely to be experienced and the potential for impact, scratching or indentation damage.

In many cases it is customary for the initial floor preparation to be left, or subcontracted, to a professional cleaning and maintenance contractor who will have the staff and equipment to do the job thoroughly.

If the optimum performance of any new floor covering is to be achieved, it is important that the correct cleaning and maintenance procedures are used from day one. Cleaning and maintenance guides for all Forbo Flooring products are available for download at: www.forbo-flooring.com.au/installation

Cleaning and maintenance guides should be passed onto the main contractor, client or end user as appropriate on completion of the installation, and before any hand over clean is started.

If in any doubt contact us:
 Tel: **1800 224 471** (office hours)
 Email: info.au@forbo.com
 Forbo Flooring Systems Pty Ltd
 Web: www.forbo-flooring.com.au