

LVT Acoustic Installation System (General Area)

Approved Forbo Resilient

ARDEX Adhesive AF 2365 / UZIN KE2000S
(applied 24hrs after Sarlibase installed)
(other Adhesive to be Approved by Inzide)

Sarlibase Acoustic 2mm 18dB
(Impervious Vinyl Sheet)


ARDEX Adhesive AF 2365 / UZIN KE2000S
(applied 24hrs after Sarlibase installed)
(other Adhesive to be Approved by Inzide)

Levelling Compound (If required)

Moisture Barrier Ardex WPM300 or similar
(If Required)

Concrete Tested to be less than 75% RH

In area of high sunlight or heavy rolling traffic use a 2 part proxy adhesive or at least KE68T, ARDEX 2525 or equivalent.

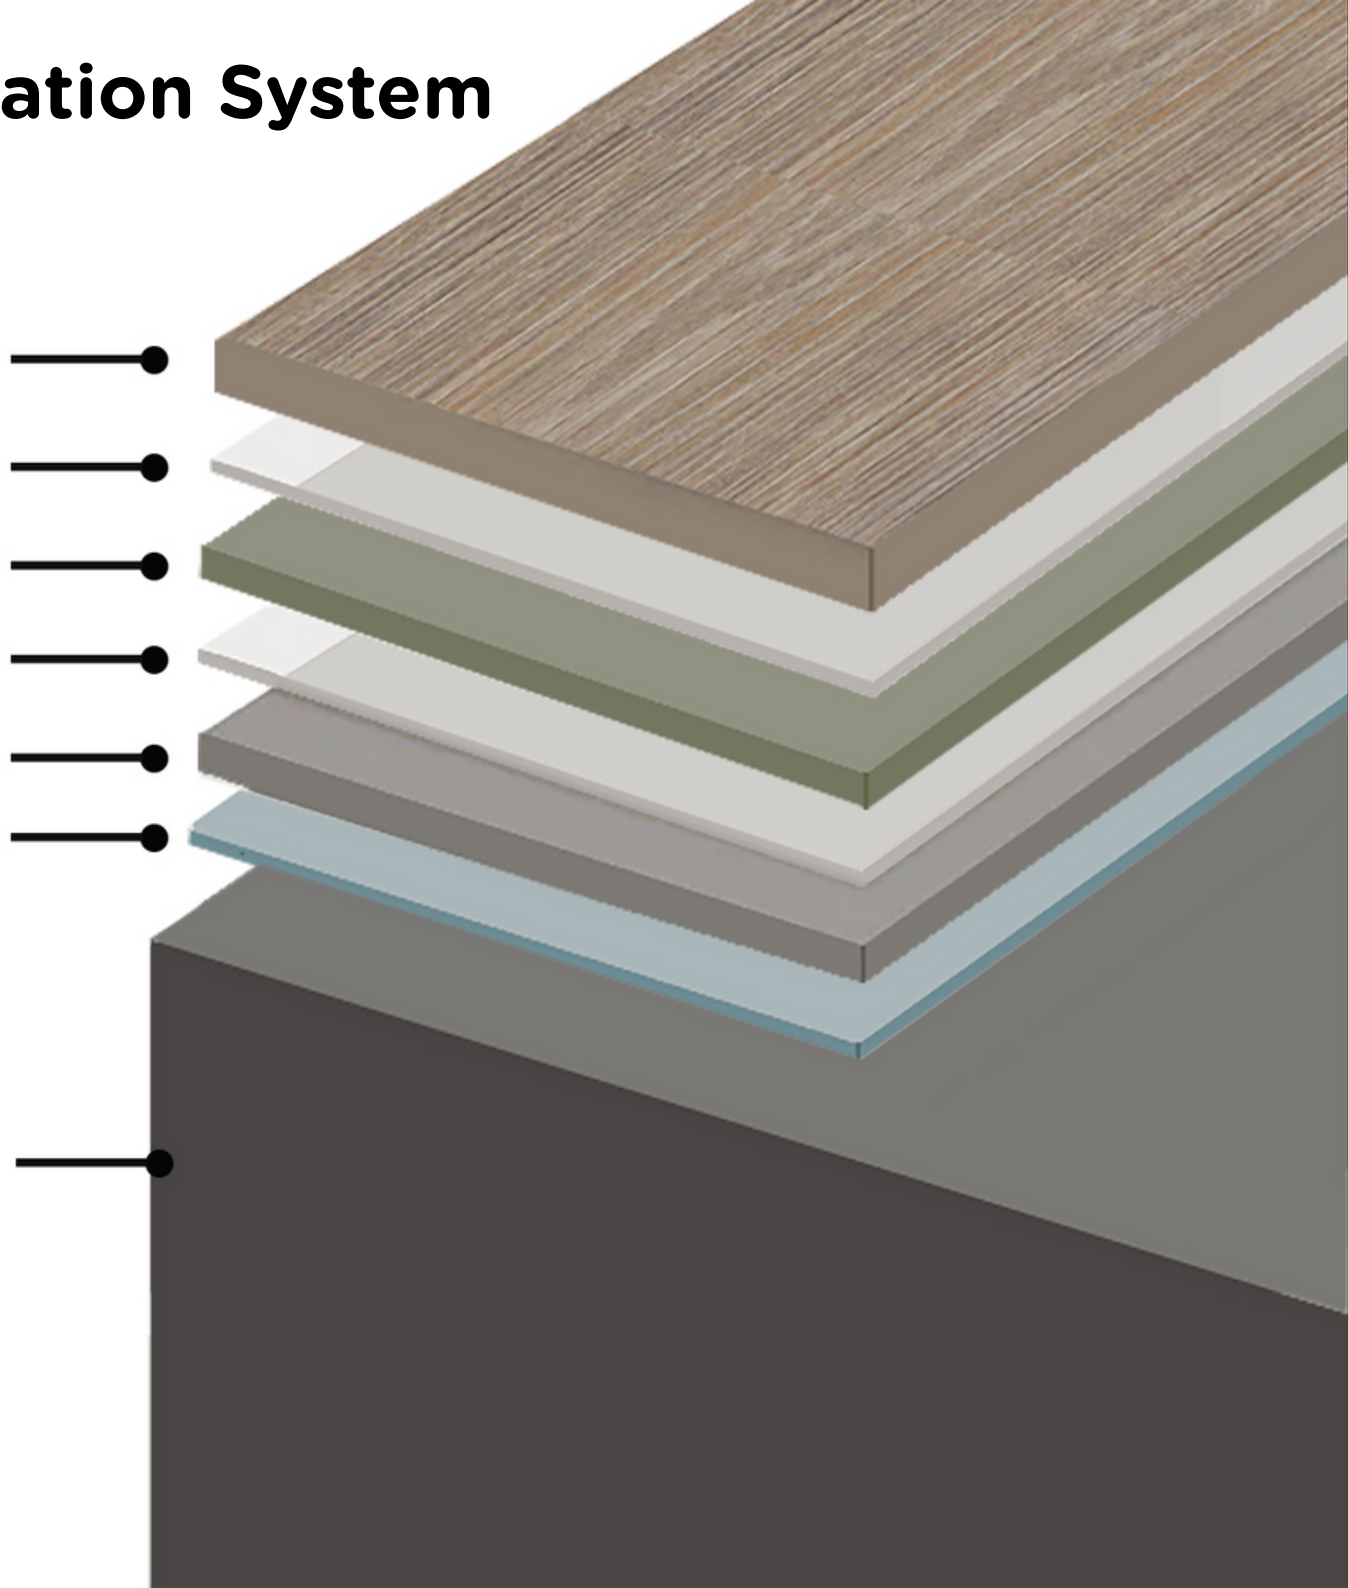


GIB Standard

LVT Acoustic Installation System (Water Splash Area)

Bond Breakern Tape

GIB Aqualine

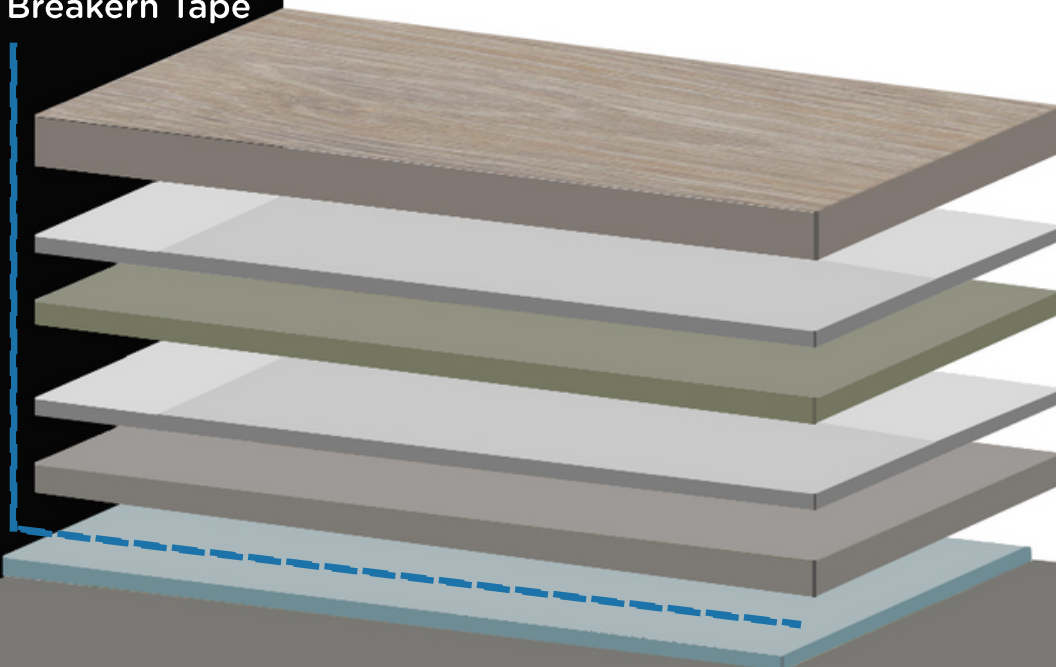

- Approved Inzide LVT
- **ARDEX Adhesive AF 2525 / UZIN KE2000S**
(applied 24hrs after Sarlibase installed)
(other Adhesive to be Approved by Inzide)
- **Sarlibase Acoustic 2mm 18dB**
(Impervious Vinyl Sheet)
- **ARDEX Adhesive AF 2525 / UZIN KE2000S**
(applied 24hrs after Sarlibase installed)
(other Adhesive to be Approved by Inzide)
- **Levelling Compound**
- **Moisture Barrier Ardex WPM300 or Similar**
(If Required)
- Concrete Tested to be less than 75% RH